


foxiGarant PUR XXS

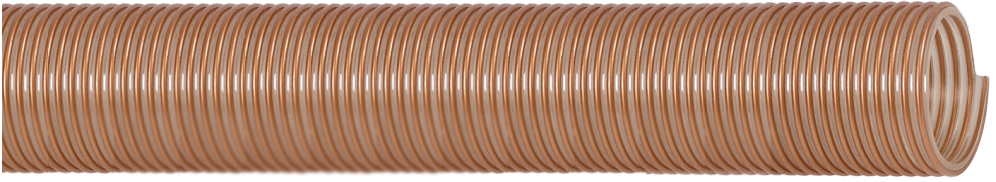

Scope of Application

For the pneumatic transport of flammable dusts and bulk materials (zone 20, 21, 22 inside), for aspiration of flammable dusts (zone 20, 21, 22 inside) and nonflammable dusts. For transport of gases and flammable liquids.

Properties

- Inside: extremely smooth
- More abrasion-resistant than common PU hoses
- Highly flexible
- Highly resistant to vertex pressure
- Good handling






- Wall thickness: approx. 2.5 mm
- Conductive
- Bacteria-resistant and hydrolysis-stabilized

Material

- 100% highly abrasion-resistant polyester PUR
- Spiral: spring steel wire, copper-coated

Temperature Range

- -40°C to +90°C

		Vacuum			
125 mm	31,18 psi	13,77 psi	350 mm	4,4 kg/m	10 m
125 mm	31,18 psi	13,77 psi	350 mm	4,4 kg/m	10 m