


PVC/NBR-Buna Gruppe 144

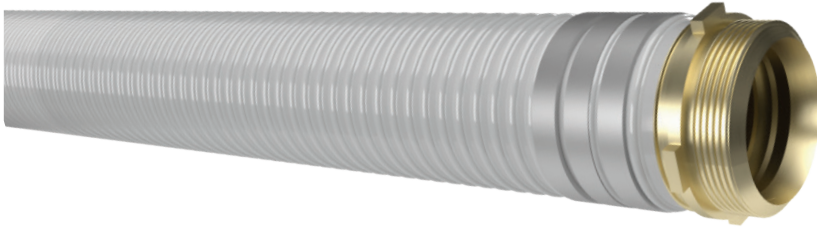

Scope of Application

New generation of synthetic suction and pressure hoses for process water, liquid manure and mineral oil when cleaning and discharging, e.g. oil separator, fat separator.

Construction


- Layout: PVC / NBR mixture grey, including a PVC spiral on the inside

Temperature range

- -30°C to +65°C

Properties

- Particularly flexible at low temperature
- Vacuum: 9mWs

Article No.		Wall thickness				
281502	51 mm	5,2 mm	0,98 kg/m	153 mm	72 psi	50 m
281504	63 mm	5,6 mm	1,2 kg/m	189 mm	65 psi	50 m
281505	76 mm	6,0 mm	1,6 kg/m	228 mm	58 psi	50 m
281506	80 mm	6,1 mm	1,7 kg/m	240 mm	43 psi	50 m
281508	102 mm	7,0 mm	2,4 kg/m	306 mm	43 psi	50 m
281510	127 mm	8,0 mm	3,3 kg/m	381 mm	29 psi	20 m
281511	152 mm	8,6 mm	4,2 kg/m	456 mm	29 psi	20 m