


PVC SD-Hose Gruppe 10

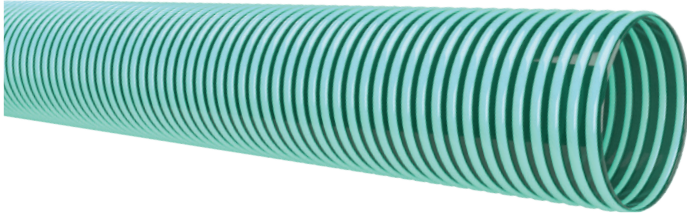

Scope of Application

Suction and pressure hose for purposes of conducting water, acids, bases and lyes for a broad variety of industry domains, irrigation and drainage projects in agriculture and distribution of fertilizers.

Properties

- Flexible suction and pressure hose
- Chemical resistance: see list for chemical resistance PVC
- Colour: green-transparent with white spiral, other colors on request






Construction

- Smooth PVC hose with inner hard PVC spiral, soft on the in- and outside

Temperature Range

- -5°C to +60°C

Whereas working under conditions of excess pressure results in a length increase, working under conditions of negative pressure results in a length decrease. This information needs to be taken into account during assembly.

Article no.		Wall thickness				
281578	13 mm	2,1 mm	0,135 kg/m	55 mm	101 psi	By the metre
280900	19 mm	2,4 mm	0,2 kg/m	80 mm	101 psi	By the metre
280903	25 mm	2,5 mm	0,25 kg/m	110 mm	101 psi	By the metre
280905	32 mm	2,8 mm	0,32 kg/m	140 mm	101 psi	By the metre
280907	38 mm	3,2 mm	0,42 kg/m	180 mm	87 psi	By the metre
281579	50 mm	3,4 mm	0,64 kg/m	240 mm	72 psi	By the metre