


BlueLine 2580N

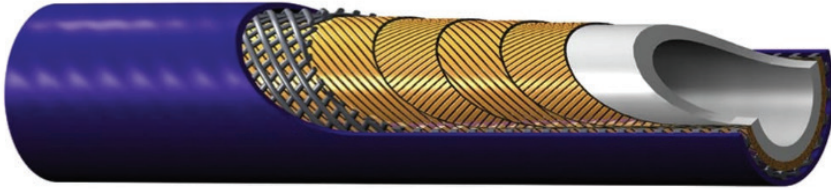

- Seele: Polyamid
- Druckträger: Vier Wickellagen und zwei offene Wickellagen Stahldraht
- Decke: Polyurethan
- Temperatur: -10°C bis +70°C
- Farbe: Dunkelblau

Bezeichnung						
2580N-06V12W	9,8 mm	21,6 mm	1.600 bar	4.000 bar	95 mm	0,94 kg/m
2580N-08V12W	12,9 mm	25,0 mm	1.400 bar	3.500 bar	150 mm	1,19 kg/m
2580N-12V12W	19,8 mm	32,6 mm	1.200 bar	3.000 bar	170 mm	1,76 kg/m

Passende Armaturen:

Armatur	2580N-06	2580N-08	2580N-12
DKOS M24 x 1,5	X	X	
DKOS M22 x 1,5	X	X	
DKR 1/2"	X	X	
DKOS M36 x 2			X
AG 3/8" NPT	X		
AG 1/2" NPT		X	
AG 1/2" NPT VA		X	
AG 3/4" NPT			X
DKR 3/8"	X		
DKR 1/2" VA		X	