


Polyflex 2240D

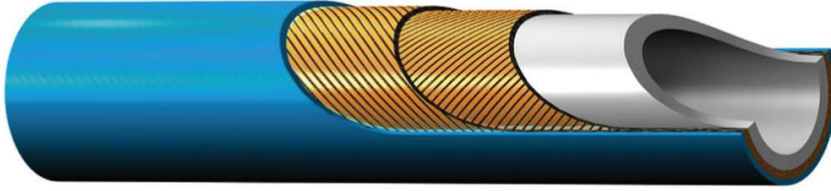

- high flexibility
 - low weight
 - inner tube: Polyoxymethylene
 - pressure carrier: two winding layers of steel wire
 - cover: polyamide
 - temperature: -10°C to +70°C
 - colour: light blue
- All hoses are also available with a Tough-Cover top cover, which provides extra protection against abrasion.

Description						
2240D-02V32	3,0 mm	7,0 mm	15.950 psi	39.875 psi	60 mm	0,07 kg/m
2240D-025V32	4,0 mm	7,7 mm	17.400 psi	43.500 psi	75 mm	0,10 kg/m
2240D-03V32	4,8 mm	9,5 mm	15.950 psi	39.875 psi	95 mm	0,13 kg/m
2240D-04V32	6,4 mm	11,5 mm	15.950 psi	39.875 psi	110 mm	0,20 kg/m

Suitable Fittings:

Fittings	2240D-02	2240D-025	2240D-03	2240D-04
Swivel nut DKOS M24 x 1,5	X	X	X	X
Swivel nut G 1/4"	X	X	X	X
Swivel nut G 3/8"				
Male M5	X	X		
Male M7	X	X	X	
Male M8		X	X	
Male M10 x1		X		X
Male 1/16" NPT	X	X		
Male G 1/8"		X	X	X
Male 1/8" NPT	X	X	X	
Male 3/8" NPT				
Male G 1/4"		X	X	X
Male 1/4" NPT		X	X	X
Press nozzle 3 x RS, 1 x VS	X	X		
Press nozzle 2 x RS, 2 x 90°	X	X		
Male 1/4"-28 UNF LH		X		
Male 3/8"-24 UNF LH			X	X