








Polyflex 2248-TC

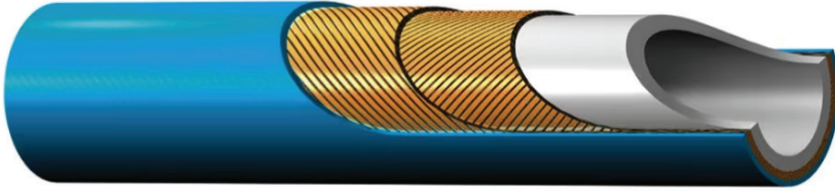

- high flexibility
- low weight
- inner tube: polyoxymethylene
- pressure carrier: two layers of steel wire
- cover: polyamide
- temperature: -10°C to +70°C
- particularly resistant to abrasion thanks to the tough cover

Description						
2248D-025V32-TC	4,0 mm	7,9 mm	21.750 psi	54.375 psi	75 mm	0,10 kg/m
2248D-03V32-TC	4,9 mm	9,5 mm	20.300 psi	50.750 psi	95 mm	0,14 kg/m
2248D-05V32-TC	8,1 mm	13,4 mm	14.500 psi	36.250 psi	120 mm	0,25 kg/m

Suitable Fittings:

Fittings	2248D-025	2248D-03	2248D-05
Swivel nut DKOS M 24 x 1,5	X	X	X
Swivel nut G 1/4"	X	X	
Swivel nut G 3/8"			X
Press nozzle	X		
Male M5	X		
Male M7	X		
Male M8	X	X	
Male M10 x 1	X		
Male G 1/4"	X	X	X
Male G 1/8"	X	X	
Male 1/8" NPT	X		
Male 1/16" NPT			
Male G 3/8"			X
Male 3/8" NPT			X
Male 1/4"-28 UNF LH	X		
Male 3/8"-24 UNF LH		X	X