


# Polyflex 2440D

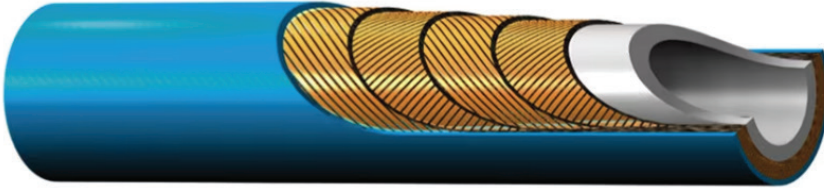

- inner tube: polyoxymethylene
  - pressure carrier: four layers of steel wire
  - cover: polyamide
  - temperature: -10°C to +70°C
- All hoses are also available with a Tough-Cover top cover, which provides extra protection against abrasion.

Description						
2440D-02V32	3,0 mm	7,9 mm	30.450 psi	76.150 psi	100 mm	0,12 kg/m
2440D-025V32	4,0 mm	10,4 mm	31.900 psi	79.750 psi	100 mm	0,21 kg/m
2440D-03V32	4,8 mm	11,5 mm	26.100 psi	65.250 psi	130 mm	0,28 kg/m
2440D-04V32	6,4 mm	12,5 mm	23.780 psi	59.450 psi	155 mm	0,33 kg/m
2440D-05V32	8,1 mm	15,1 mm	21.750 psi	54.375 psi	175 mm	0,44 kg/m

## Suitable Fittings:

Fittings	2440D-02	2440D-025	2440D-03	2440D-04	2440D-05
Swivel nut DKOS M16 x 1,5	X	X			
Swivel nut DKOS M18 x 1,5				X	
Swivel nut DKOS M20 x 1,5					X
Swivel nut DKOS M22 x 1,5			X		X
Swivel nut DKOS M24 x 1,5			X	X	X
Swivel nut G 1/4"			X	X	
Swivel nut G 3/8"					X
Swivel nut 9/16" - 18 UNF	X	X	X		
Male G 1/4"		X		X	X
Male 1/4"-28 UNF LH	X	X	X		
Male 1/4" - 28 UNF short		X	X		
Male 3/8"-24 UNF LH		X	X	X	X
Male G 3/8" - kurz			X	X	
Male 9/16"-18 UNF LH			X	X	X
Male M 14 x 1,5 LH		X			X
Male 1/4"-28 UNF RE		X			