








Polyflex 2740D

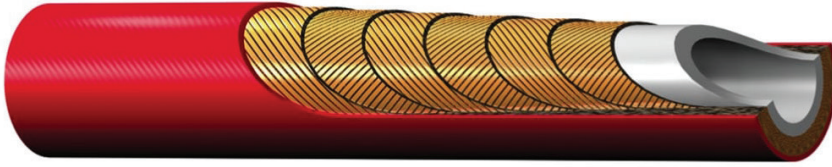

- inner tube: polyoxymethylene
- pressure carrier: six layers of steel wire
- cover: polyurethane (DN4), polyamide (DN5, DN8, DN12)
- temperature: -10°C to +70°C
- colour: black (DN4), red (DN5)

Description						
2740D-025V16	3,9 mm	12,0 mm	43.500 psi	113.100 psi	120 mm	0,40 kg/m
2740D-03V34	4,8 mm	13,2 mm	40.600 psi	101.500 psi	200 mm	0,47 kg/m
2740D-03V34/15 TJ	12,7 mm	27,0 mm	29.000 psi	72.500 psi	300 mm	1,85 kg/m

Suitable Fittings:

Fittings	2740D-025	2740D-03	2740D-03-TJ
Male 9/16 – 18 UNF		X	X
Male M14 x 1,5 LH	X	X	X
Male 3/8 - 24 UNF LH	X	X	X
Swivel nut 9/16 – 18 UNF Type M	X	X	X
Swivel nut 3/4 – 16 UNF			
Swivel nut G1/4"		X	X
Swivel nut M24 x 1,5			
LOK DN5/DN8		X	X
Male 1/4 – 24 UNF LH	X	X	X

The Tough Jacket variant (2740D-03V34/15-TJ) has an additional orange polyurethane cover over the original red one.