





Polyflex 2640D

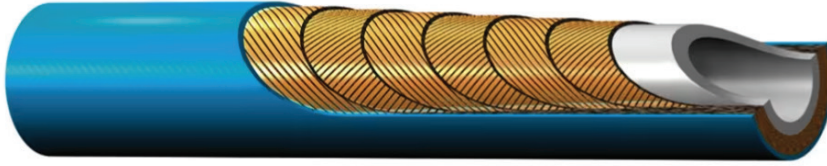

- Seele: Polyoxymethylen
- Druckträger: Sechs Wickellagen Stahldraht
- Decke: Polyamid
- Temperatur: -10°C bis +70°C
- Farbe: Hellblau

Bezeichnung						
2640D-025V32	3,9 mm	12,0 mm	2.800 bar	7.000 bar	140 mm	0,29 kg/m
2640D-03V32	4,8 mm	13,0 mm	2.500 bar	6.250 bar	175 mm	0,41 kg/m
2640D-05V32	8,0 mm	16,9 mm	2.100 bar	5.250 bar	200 mm	0,64 kg/m

Passende Armaturen:

Armatur	2640D-025	2640D-03	2640D-05
AG 1/4" - 28 UNF LH	X	X	
AG 3/8" - 24 UNF LH	X	X	X
AG 9/16" - 18 UNF		X	X
AG M14 x 1,5 LH	X	X	X
ÜM 3/4" -16 UNF			X
ÜM 9/16" - 18 UNF	X	X	
LOK-System DN 5-8		X	X