








# Polyflex 2740D

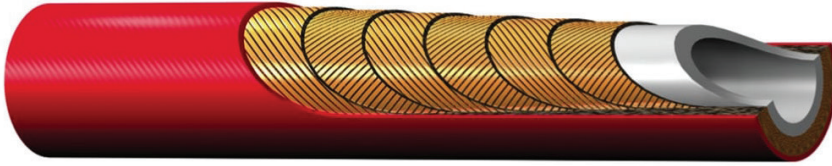

- Seele: Polyoxymethylen
- Druckträger: Sechs Wickellagen Stahldraht
- Decke: Polyurethan (DN4), Polyamid (DN5, DN8, DN12)
- Temperatur: -10°C bis +70°C
- Farbe: Schwarz (DN4), Rot (DN5)

| Bezeichnung               |  |  |  |  |  |  |
|---------------------------|---|---|---|---|---|--|
| <b>2740D-025V16</b>       | 3,9 mm  | 12,0 mm   | 3.000 bar   | 7.800 bar   | 120 mm  | 0,40 kg/m  |
| <b>2740D-03V34</b>        | 4,8 mm  | 13,2 mm   | 2.800 bar   | 7.000 bar   | 200 mm  | 0,47 kg/m  |
| <b>2740D-03V34/15 -TJ</b> | 4,8 mm  | 17,3 mm   | 2.800 bar   | 7.000 bar   | 200 mm  | 0,58 kg/m  |

## Passende Armaturen:

| Armatur                | 2740D-025 | 2740D-03 | 2740D-03-TJ |
|------------------------|-----------|----------|-------------|
| AG 9/16 – 18 UNF       |           | X        | X           |
| AG M14 x 1,5 LH        | X         | X        | X           |
| AG 3/8 - 24 UNF LH     | X         | X        | X           |
| ÜM 9/16 – 18 UNF Typ M | X         | X        | X           |
| ÜM 3/4 – 16 UNF        |           |          |             |
| ÜM G1/4"               |           | X        | X           |
| DKOS M24 x 1,5         |           |          |             |
| LOK DN5/DN8            |           | X        | X           |
| AG 1/4 – 24 UNF LH     | X         | X        | X           |

Die Tough-Jacket Variante (2740D-03V34/15-TJ) trägt über der ursprünglichen Roten noch eine zusätzliche Decke aus orangem Polyurethan.